


2" LED ARCHITECTURAL SQUARE FLANGE WALL WASH

REMODEL

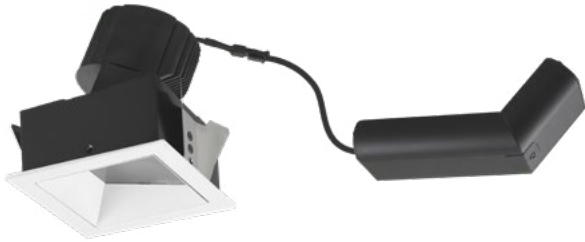

GENERAL INFORMATION

USE OF PRODUCT

The 2" Prime Wall Wash is a small aperture fixture which is ideal for residential and commercial applications. Available options include die-cast trims, various color temperatures, optics, filters, and dimmable drivers.

LED ENGINE

LED engine available in 2700K, 3000K, 3500K, or 4000K in standard 90+ CRI. 2-step MacAdam ellipse allows for color consistency between fixtures. The LED is mounted to an aluminum heat sink for maximum life output and thermal management. LED engine is accessible from below the ceiling.

OPTICAL LENS

Field replaceable optical lenses are available in 15°, 24°, 36°, and 50° Easily achieve narrow spot to wide flood beam pattern.

ADJUSTMENT

- Light engine locked at 20° tilt, consult factory for other tilt settings.
- Supports 359° locking rotation with 40° tilt adjustment

DIMMING

Available in five driver selections. (ID) Standard all-inclusive ELV (120V), Triac (120V), and 0–10V (120–277V) dimming driver called Intelligent Drive, 120–277V. (EEIS) eldoLED 1% Dim 0-10V (120-277V), Triac (120V), Max 20W. (EDIO) eldoLED 0.1% Dim (0–10V), 120–277V. (EDID) eldoLED 0.1% Dim (DALI). (EDD) eldoLED 1% Dim (DALI2). Drivers accessible from below the ceiling.

TRIM

Flange trims available in die-cast and includes standard frosted acrylic diffuser. Remove standard frosted acrylic diffuser in field for 7% lumens increase. Consult factory for made-to-order finishes. Wet location for bathrooms and showers with standard lens on trim.

EMERGENCY BATTERY

Optional Emergency Battery (EM) available in 4W (≈400 lm), 8W (≈800 lm), or 15W (≈1,500 lm) available for a minimum of 90 minutes. EM is replaceable from below the ceiling.

LABELS/COMPLIANCE/WARRANTY

- CSA listed for US and Canada
- Dry/Damp/Wet location rated
- 5-year limited warranty




GENERAL PERFORMANCE CHART

\*Detailed performance chart may be found on page 2

|                  | 6W      | 9W      | 12W       | 15W       | 20W       |
|------------------|---------|---------|-----------|-----------|-----------|
| Initial Lumens   | 955     | 1296    | 1618      | 2015      | 2422      |
| Delivered Lumens | 593-619 | 805-840 | 1009-1050 | 1225-1273 | 1486-1546 |

\* Values are listed at 3000K, 90+ CRI with a white bevel & trim.  
Delivered lumens range based on beam spread.  
Performance may vary +/- 5%

BEAM SPREAD




Field replaceable TIR optics

PRIME FAMILY OF PRODUCTS




Downlight




TechZone®



WoodWorks®



Multiple Dedicated Bevel



Multiple Open Bevel



Cylinder



Square Luminaire

2" LED ARCHITECTURAL SQUARE FLANGE WALL WASH

REMODEL

ORDERING INFORMATION

|                      |                                                                               |                                                                                                                                                                                                                                                                                                                                                |                                                          |                                              |                                                                                                   |
|----------------------|-------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|----------------------------------------------|---------------------------------------------------------------------------------------------------|
| Series               | Wattage                                                                       | Dimming                                                                                                                                                                                                                                                                                                                                        | Color Temperature                                        | Optical Lens                                 | Filter                                                                                            |
| RPA2                 | 6W - 6 Watt<br>9W - 9 Watt<br>12W - 12 Watt<br>15W - 15 Watt<br>20W - 20 Watt | ID <sup>1</sup> - Standard All-Inclusive ELV(120V),<br>Triac(120V), and 0-10V(120-277V)<br>Dimming Driver (Intelligent Drive)<br>EEIS <sup>2</sup> - eldoLED 1% Dim 0–10V (120-127V), Triac (120V)<br>EDIO <sup>2</sup> - eldoLED 0.1% Dim (0–10V)<br>EDID <sup>2</sup> - eldoLED 0.1% Dim (DALI)<br>EDD <sup>2</sup> - eldoLED 1% Dim (DALI2) | 27K - 2700K<br>30K - 3000K<br>35K - 3500K<br>40K - 4000K | 15 - 15°<br>24 - 24°<br>36 - 36°<br>50 - 50° | None - Included<br>F - Frosted Filter<br>H - Honey Comb<br>S - Solite Filter<br>L - Linear Filter |
| Housing Type         | Module Type                                                                   | Options                                                                                                                                                                                                                                                                                                                                        |                                                          |                                              |                                                                                                   |
| FRS - Remodel Square | AMHW - Accent Wall Wash                                                       | ER4W - Emergency Battery with Remote Test Switch (400 lm)<br>ER8W - Emergency Battery with Remote Test Switch (800 lm)<br>ER15W - Emergency Battery with Remote Test Switch (1,500 lm)                                                                                                                                                         |                                                          |                                              |                                                                                                   |

TRIM ORDERING INFORMATION

|                          |                         |                                                                                       |                                                              |                                                                                                    |
|--------------------------|-------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Bevel / Flange Finish    | Trim Type               | Bevel                                                                                 | Flange                                                       | Notes                                                                                              |
| May be mixed and matched | 2" Square Flange Accent | W - White<br>B - Black<br>H - Haze<br>C - Clear<br>BZ - Bronze<br>MTO - Made To Order | W - White<br>B - Black<br>BZ - Bronze<br>MTO - Made To Order | 1. Intelligent Drive is the standard driver<br>2. Must specify logarithmic or linear eldoLED diver |

PERFORMANCE CHART



| Optics |                  | 15°  | 24°  | 36°  | 50°  |
|--------|------------------|------|------|------|------|
| 6W     | Initial Lumens   | 955  | 955  | 955  | 955  |
|        | Delivered Lumens | 593  | 618  | 619  | 611  |
| 9W     | Initial Lumens   | 1296 | 1296 | 1296 | 1296 |
|        | Delivered Lumens | 805  | 840  | 840  | 830  |
| 12W    | Initial Lumens   | 1618 | 1618 | 1618 | 1618 |
|        | Delivered Lumens | 1009 | 1050 | 1050 | 1037 |
| 15W    | Initial Lumens   | 2015 | 2015 | 2015 | 2015 |
|        | Delivered Lumens | 1225 | 1273 | 1273 | 1257 |
| 20W    | Initial Lumens   | 2422 | 2422 | 2422 | 2422 |
|        | Delivered Lumens | 1486 | 1543 | 1546 | 1524 |

\* Values are listed at 3000K, 90+ CRI with a white bevel & trim.

COLOR TEMPERATURE MULTIPLIER FOR DELIVERED LUMENS

| 2700K | 3000K | 3500K | 4000K |
|-------|-------|-------|-------|
| 0.95  | 1.00  | 1.04  | 1.07  |

TRIM DIMENSIONS

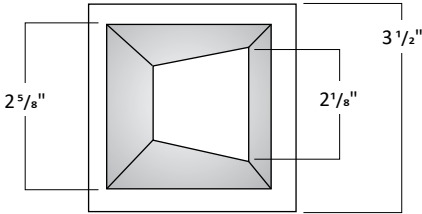

MODULE DIMENSIONS

2" PRIME REMODEL DIMENSIONS

DRIVER BOX DIMENSIONS

