

## PRIME 4" LED ARCHITECTURAL ROUND FLANGELESS TURTLE FRIENDLY DOWNLIGHT



## USE OF PRODUCT

The 4" Prime Turtle friendly Series is suitable for use in ecologically sensitive areas, sea turtle nesting areas, migratory corridors and Dark Sky friendly communities. Light produced by the Amber LED is visible to humans and can be safely used for outdoor lighting applications, but it is virtually undetectable to sea turtles and other forms of marine wildlife.

## LED ENGINE

Amber color temperature for optimal spectral power distribution for preservation of endangered sea turtle populations.

## FRAME CONSTRUCTION

Constructed from 16 gauge heavy duty powder coated cold rolled steel frame with a large access junction box.

## ADJUSTMENT

- Housing provides for 360° locking rotation
- Aperture collar adjusts 15°± horizontally within frame for square ceiling alignment
- Collar notch allows for easy alignment for square applications.
- Aperture collar compatible up to 1½" ceiling thickness.
- Accommodation for 2" or 3" ceiling thickness available upon request.

## OPTICS

Field replaceable optical lens available in 30°, 50°. Easily achieve narrow spot to wide flood beam pattern. Option for frosted, honeycomb, or solite filter (2 maximum).

## DIMMING

Available in 7 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V.

(L3DA) Hi-lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V.

## THERMAL MANAGEMENT

Ambient temperatures at fixture location should not exceed -20° to 40°C.

## EMERGENCY BATTERY

Optional emergency battery available for a minimum of 90 minutes with both integral or remote test switch in 800 or 1700 delivered lumens.

## TRIM OPTIONS

- All Bevels are self flange die cast or anodized.
- Trim includes standard frosted acrylic diffuser.
- 12% lumens increase if remove standard frosted acrylic diffuser in field.
- Optical Enhancer reflects light evenly across the diffusion lens.
- Trims available in round or square in an assortment of standard or made to order finishes.

## LABELS/COMPLIANCE/WARRANTY

- CSA Listed for US and Canada
- Certified FWC
- 5 Year limited warranty

## ORDERING INFORMATION

## RPA

| Series | Aperture Size | Lumens      | Color Temperature | Voltage                                                | Dimming                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Optical Lens <sup>5</sup> | Filter                                                                          |
|--------|---------------|-------------|-------------------|--------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|---------------------------------------------------------------------------------|
| RPA    | 4 - 4"        | 5L - 500 lm | A - Amber         | UNV - 120-277<br>120 - 120V<br>347 <sup>1</sup> - 347V | ID <sup>2</sup> Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive)<br>PEQ0 Lutron Hi-Lume Premier Ecosystem 0.1% w/ soft on, fade to black dimming<br>LDE1 Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming<br>L3DA Hi-lume 1% EcoSystem/3-Wire L3D Driver<br>EEI <sup>4</sup> eldoLED Eco 1% Dim (0-10V)<br>EDIO <sup>4</sup> eldoLED Solo 0.1% Dim (0-10V)<br>EDID <sup>4</sup> eldoLED Solo 0.1% Dim (DALI) | 30 - 30°<br>50 - 50°      | None - Leave blank<br>F - Frosted filter<br>H - Honey comb<br>S - Solite filter |

| Housing Type                    | Aperture                                                                               | Frame Accessories                                                  | Collar                                                                    | Options                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IC - Air-tight New Construction | RLDP - Round Flangeless Downlight Plaster<br>RLDM - Round Flangeless Downlight Milwork | UH <sup>6</sup> - Universal bar hanger<br>C - C-Channel bar hanger | Blank - 1.5" Depth<br>2 - 2" Depth<br>3 - 3" Depth<br>MTO - Made to order | EI8 - Emergency battery with integral switch(800 Lumens)<br>ER8 - Emergency battery with remote switch (800 Lumens)<br>EI17 - Emergency battery with integral switch(1700 Lumens)<br>ER17 - Emergency battery with remote switch (1700 Lumens)<br>FCJS-E - Vive wireless individual controller(Ecosystem)<br>FCJS-0 - Vive wireless individual controller(0-10)<br>LAW - Lutron Athena Wireless Node (RF only version)<br>CP <sup>6</sup> - Chicago Plenum |


## TRIM ORDERING INFORMATION

| Aperture Size / Shape / Trim Type / Style | Bevel Finish                                                                                  | Options           |
|-------------------------------------------|-----------------------------------------------------------------------------------------------|-------------------|
| 4RLO - 4" Round Flangeless Open           | W - White<br>B - Black<br>H - Haze<br>S - Specular clear<br>WE - Wheat<br>MTO - Made to order | WL - Wet Location |



1. Step down transformer required.
2. Intelligent Drive is the standard driver.
3. 120V only.
4. Must specify logarithmic or linear eldoLED diver.
5. Without standard frosted acrylic diffuser.
6. Requires IC Housing

PERFORMANCE CHART


| Color | Dominant Wavelength Range |             |         |             | Minimum Luminous Flux<br>(lm) @ 350 mA |           |
|-------|---------------------------|-------------|---------|-------------|----------------------------------------|-----------|
|       | Minimum                   |             | Maximum |             |                                        |           |
|       | Group                     | DWL<br>(nm) | Group   | DWL<br>(nm) | Group                                  | Flux (lm) |
| Amber | A2                        | 585         | A3      | 595         | P4                                     | 80.6      |
|       |                           |             |         |             | P3                                     | 73.9      |
|       |                           |             |         |             | P2                                     | 67.2      |
|       |                           |             |         |             | N4                                     | 62        |
|       |                           |             |         |             | N3                                     | 56.8      |

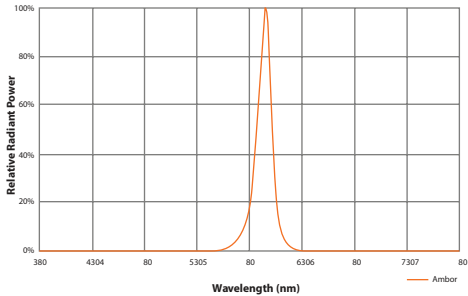



TRIM DIMENSIONS



HOUSING DIMENSIONS

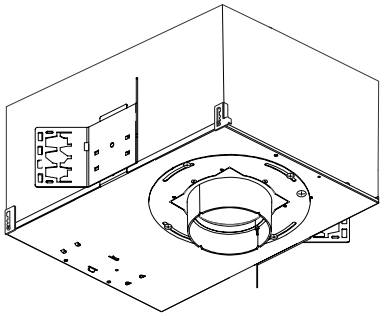

IC - IC Air-Tight New Construction

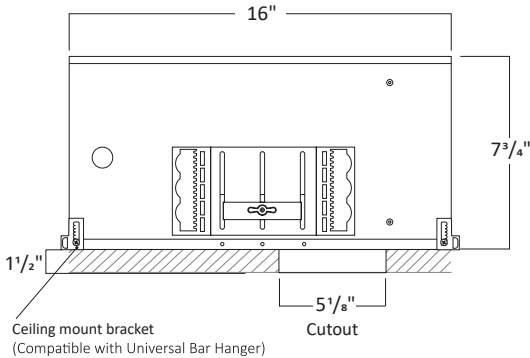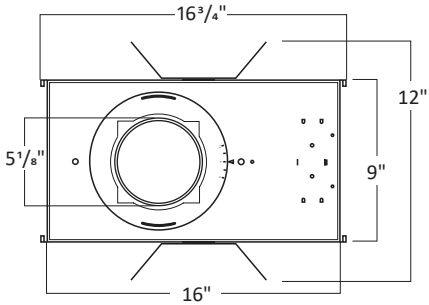


FRAME ACCESSORIES

UNIVERSAL BAR HANGER

COMPATIBLE CEILING

- Hat Channel
- T-Bar
- C-Channel
- Laminated Wood
- Quick-Span
- I-Beam
- Standard Joist

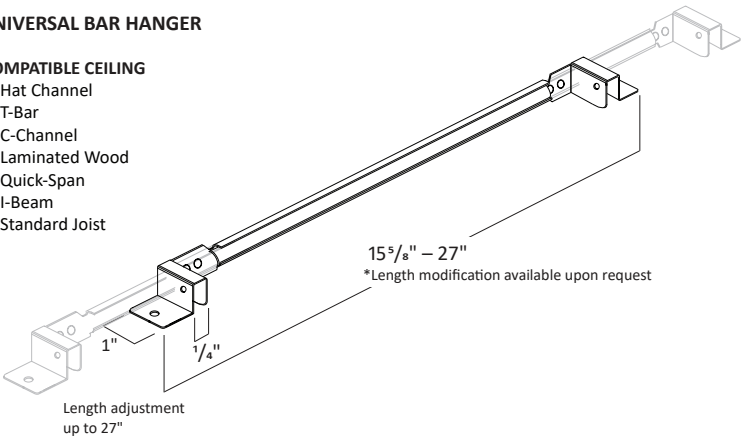

C-CHANNEL BAR HANGER

