

ARCHITECTURAL CABLE SUSPENDED



The Elevate Multiple Series offers a architectural point source solution. Offered in an assortment of lumen, color temperature, beam angle, and filter options that may be modified in the field. Modules are available in bevel, regress, or snoot appearance. This product is for indoor use only.

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management. Light engine provides a quick disconnect with locking strain relief to housing.

Cross Blade Dimensions: .750" x .250"

Double gimbal adjustment with locking mechanism. 35° X 35°

Field replaceable TIR optics available in 12°, 22°, 27°, 35°, and 45°. Easily achieve narrow spot to wide flood beam pattern. Option for frosted, honeycomb, or solite filter (2 maximum).

Available in 7 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQO) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (L3DA) Hi-lume 1% EcoSystem/3-Wire L3D Driver (EEL) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V. All drivers are field replaceable.

Ambient temperatures at fixture location should not exceed -20° to 40°C.

Suspended ceiling mount with aircraft cable.

- 5 Year limited warranty



RPM — Housing Size — Profile — Mounting types — Module Configuration — Lumens Per Head — Color Temperature — Voltage — Dimming — Optical Lens — Filter — Trim Type — Frame Finish


Dimming		Optical Lens	Filter	Trim Type	Frame Finish	Note
ID²	Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive)	12 - 12 ^º 22 - 22 ^º	None - Leave blank F - Frosted filter	B - Bevel R - Regress	B - Black MTO - Made to Order	1. 5ft standard cable length. 2. Intelligent Drive is the standard driver. 3. 120V only.
PEQ0	Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming	27 - 27 ^º 35 - 35 ^º	H - Honey comb S - Solite filter	S - Snoot		4. Must specify logarithmic or linear eldoLED driver. 5. Confirm dimming curve: linear or logarithmic.
LDE1	Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming	45 - 45 ^º				
L3DA	Hi-lume 1% EcoSystem/3-Wire L3D Driver					
EEI^{4,5}	eldoLED Eco 1% Dim (0-10V)					
EDIO^{4,5}	eldoLED Solo 0.1% Dim (0-10V)					
EDID^{4,5}	eldoLED Solo 0.1% Dim (DALI)					

LUMEN CHART			
Wattage	Delivered Lumens	Voltage	CRI
10W	890 lm	120 - 277V	93+
14W	1175 lm	120 - 277V	93+
20W	1650 lm	120 - 277V	93+
30W	2100 lm	120 - 277V	93+

*Above chart, ordering information, and IES File name reflect delivered lumens based 3000K and 30° optical lens.

**Lumens will vary based on CCT, optical lens, and bevel finish.

DIMENSION

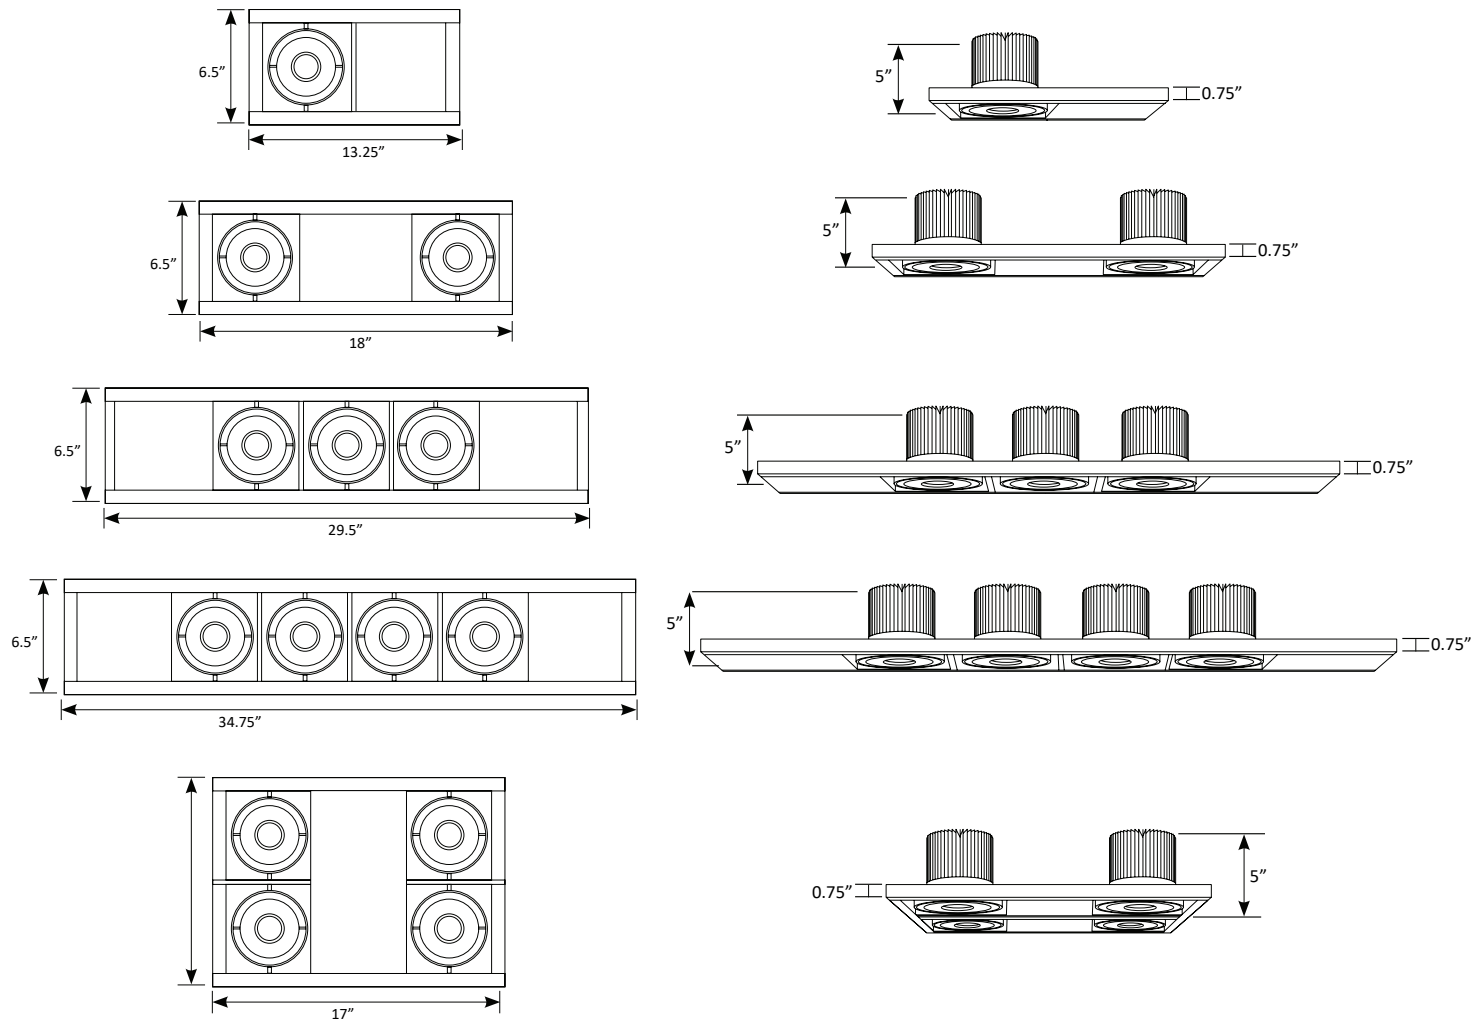


OPTICAL




12°, 22°, 27°, 35°, 45°

FILTERS

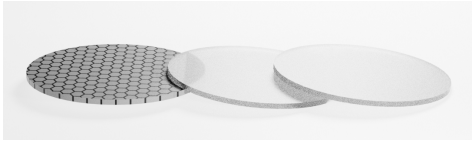

H - Honey comb F - Frosted filter S - Solite filter

TRIM TYPE

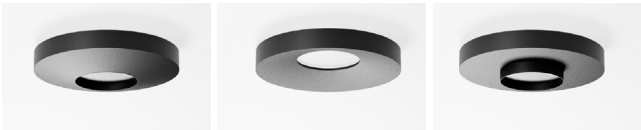

B - Bevel R - Regress S - Snoot