



USE OF PRODUCT
The Elevate Mutiple Series offers a architectural point source solution. Offered in an assortment of lumen, color temperature, beam angle, and filter options that may be modified in the field. Modules are available in bevel, regress, or snoot appearance. This product is for indoor use only.

LED ENGINE
LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management. Light engine provides a quick disconnect with locking strain relief to housing.

FRAME CONSTRUCTION
Constructed from heavy duty aluminum with powder coat finish.
Extruded Frame Dimensions: .750" x .750" x .125"
Cross Blade Dimensions: .750" x .250"

ADJUSTMENT
Double gimbal adjustment with locking mechanism. 35° X 35°

OPTICS
Field replaceable TIR optics available in 12°, 22°, 27°, 35°, and 45°. Easily achieve narrow spot to wide flood beam pattern. Option for frosted, honeycomb, or solite filter (2 maximum).

DIMMING
Available in 7 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (L3DA) Hi-Lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V. All drivers are field replaceable.

THERMAL MANAGEMENT
Ambient temperatures at fixture location should not exceed -20° to 40°C.

MOUNTING
Suspended ceiling mount with aircraft cable.

LABELS/COMPLIANCE/WARRANTY
- CSA Listed for US and Canada
- Damp rated
- 5 Year limited warranty

ORDERING INFORMATION

ORDERING INFORMATION				RPM															
				Housing Size	Profile	Mounting types	Module Configuration	Lumens Per Head	Color Temperature	Voltage	Dimming	Optical Lens	Filter	Trim Type	Frame Finish				
Series	Housing Size	Profile	Mounting Types	Module Configuration	Lumens Per Head	Color Temperature	Voltage												
RPM	M - medium	075 - 0.75"	CS ¹ - Cable suspended	3I - Three module, integral driver	8L - 890 lm	27 - 2700K	UNV - 120-277V												
Elevate					11L - 1175 lm	30 - 3000K	120 - 120V												
Multiples					16L - 1650 lm	35 - 3500K													
Series					21L - 2100 lm	40 - 4000K													


Dimming		Optical Lens	Filter	Trim Type	Frame Finish	Note
ID ²	Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive)	12 - 12° 22 - 22°	None - Leave blank F - Frosted filter	B - Bevel R - Regress	B - Black MTO - Made to Order	1. 5ft standard cable length. 2. Intelligent Drive is the standard driver. 3. 120V only. 4. Must specify logarithmic or linear eldoLED diver. 5. Confirm dimming curve: linear or logarithmic.
PEQ0	Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming	27 - 27° 35 - 35°	H - Honey comb S - Solite filter	S - Snoot		
LDE1	Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming	45 - 45°				
L3DA	Hi-lume 1% EcoSystem/3-Wire L3D Driver					
EEI ^{4,5}	eldoLED Eco 1% Dim (0-10V)					
EDIO ^{4,5}	eldoLED Solo 0.1% Dim (0-10V)					
EDID ^{4,5}	eldoLED Solo 0.1% Dim (DALI)					

LUMEN CHART			
Wattage	Delivered Lumens	Voltage	CRI
10W	890 lm	120 - 277V	93+
14W	1175 lm	120 - 277V	93+
20W	1650 lm	120 - 277V	93+
30W	2100 lm	120 - 277V	93+

*Above chart, ordering information, and IES File name reflect delivered lumens based 3000K and 30° optical lens.

**Lumens will vary based on CCT, optical lens, and bevel finish.

DIMENSION

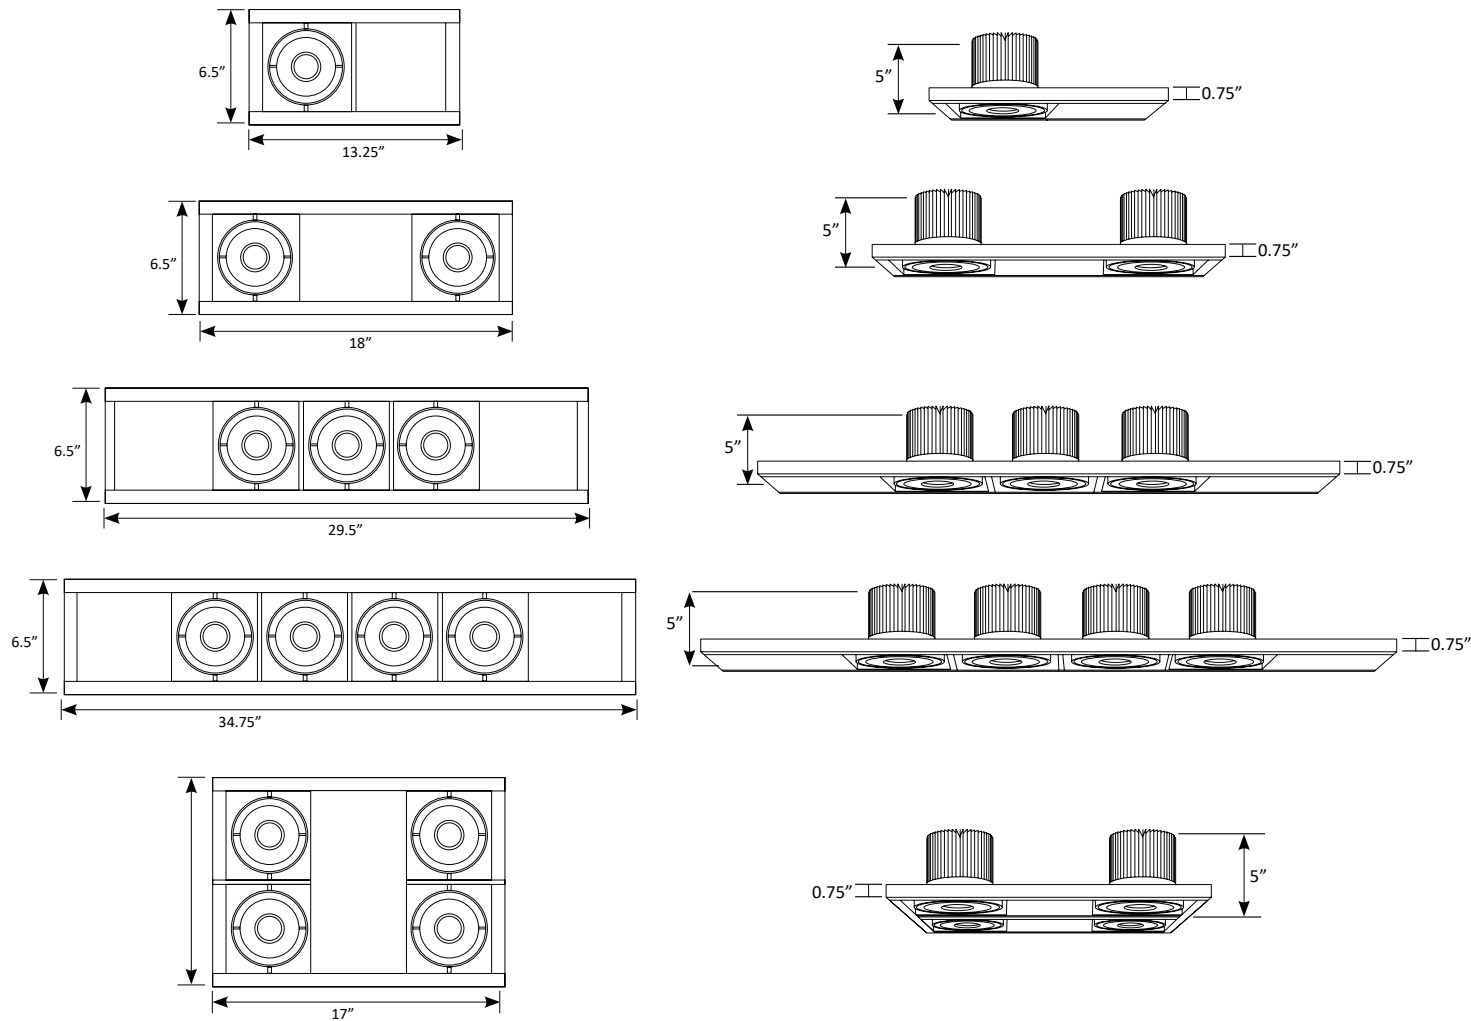


OPTICAL




12°, 22°, 27°, 35°, 45°

FILTERS

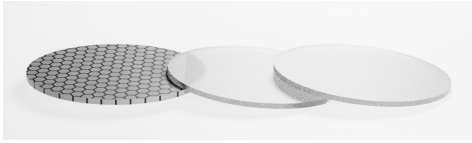

H - Honey comb F - Frosted filter S - Solite filter

TRIM TYPE

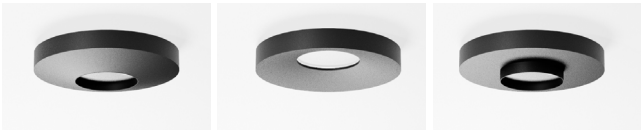

B - Bevel R - Regress S - Snoot