



**USE OF PRODUCT**  
The Elevate Architectural Surface Mount Series offers a point source solution that is available in a single gimbal with retractable yoke. Offered in an assortment of lumen, color temperature, beam angle, and filter options that may be modified in the field. Modules are available in bevel, regress, or snoot appearance. This product is for indoor use only.

**LED MODULE**  
Cree LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management. LED module is field replaceable.

**FRAME CONSTRUCTION**  
Constructed from 20 gauge cold rolled steel with powder coat finish.

**ADJUSTMENT**  
Single gimbal (45° Tilt) with retractable yoke and 360° rotation. both mechanisms are lockable.

**OPTICS**  
Field replaceable TIR optics available in 12°, 22°, 27°, 35°, and 45°. Easily achieve narrow spot to wide flood beam pattern. Option for frosted, honeycomb, or solite filter (2 maximum).

**DIMMING**  
Available in 7 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (L3DA) Hi-lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V. All drivers are integral and are field replaceable.

**THERMAL MANAGEMENT**  
Ambient temperatures at fixture location should not exceed -20° to 40°C.

**MOUNTING**  
Mounts directly to junction box.

**LABELS/COMPLIANCE/WARRANTY**  
- CSA Listed for US and Canada  
- Damp rated  
- 5 Year limited warranty



ORDERING INFORMATION

| ORDERING INFORMATION |                                                                                 |                    | RPM                                |                |                      |                    |                   |                |                          |         |              |                     |           |              |                     |  |  |                                                     |  |  |
|----------------------|---------------------------------------------------------------------------------|--------------------|------------------------------------|----------------|----------------------|--------------------|-------------------|----------------|--------------------------|---------|--------------|---------------------|-----------|--------------|---------------------|--|--|-----------------------------------------------------|--|--|
|                      |                                                                                 |                    | Family                             | Mounting types | Module Configuration | Lumens Per Head    | Color Temperature | Optical Lens   | Voltage                  | Dimming | Optical Lens | Filter              | Trim Type | Frame Finish |                     |  |  |                                                     |  |  |
| Series               | Housing Size                                                                    | Mounting Types     | Module Configuration               |                |                      | Lumens Per Head    | Color Temperature | Voltage        |                          |         | Dimming      |                     |           |              |                     |  |  |                                                     |  |  |
| RPM                  | M - Medium                                                                      | SM - Surface Mount | 1 - One module                     |                |                      | 8L - 890 lm        | 27 - 2700K        | UNV - 120-277V |                          |         |              |                     |           |              |                     |  |  |                                                     |  |  |
| Elevate              |                                                                                 |                    | 2 - Two module                     |                |                      | 11L - 1175 lm      | 30 - 3000K        | 120 - 120V     |                          |         |              |                     |           |              |                     |  |  |                                                     |  |  |
| Series               |                                                                                 |                    | 3 - Three module                   |                |                      | 16L - 1650 lm      | 35 - 3500K        |                |                          |         |              |                     |           |              |                     |  |  |                                                     |  |  |
|                      |                                                                                 |                    | 4 - Four module                    |                |                      | 21L - 2100 lm      | 40 - 4000K        |                |                          |         |              |                     |           |              |                     |  |  |                                                     |  |  |
|                      |                                                                                 |                    | 4S - Four module w/ Square Config. |                |                      |                    |                   |                |                          |         |              |                     |           |              |                     |  |  |                                                     |  |  |
|                      |                                                                                 |                    | MTO - Made to order                |                |                      |                    |                   |                |                          |         |              |                     |           |              |                     |  |  |                                                     |  |  |
|                      |                                                                                 |                    |                                    |                |                      |                    |                   |                |                          |         |              |                     |           |              |                     |  |  |                                                     |  |  |
| Dimming              |                                                                                 |                    | Optical Lens                       |                |                      | Filter             |                   |                | Module Type              |         |              | Frame Finish        |           |              | Module Finish       |  |  | Options                                             |  |  |
| ID <sup>1</sup>      | Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive) |                    | 12 - 12°                           |                |                      | None - Leave blank |                   |                | R <sup>5</sup> - Regress |         |              | B - Black           |           |              | B - Black           |  |  | EM - Emergency Battery                              |  |  |
| PEQ0                 | Lutron Hi-Lume Premier Ecosystem 0.1% w/ soft on, fade to black dimming         |                    | 22 - 22°                           |                |                      | F - Frosted filter |                   |                | B - Bevel                |         |              | W - White           |           |              | W - White           |  |  | LAW - Lutron Athena Wireless Node (RF only version) |  |  |
| LDE1                 | Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming                 |                    | 27 - 27°                           |                |                      | H - Honeycomb      |                   |                | S - Snoot                |         |              | S - Silver          |           |              | S - Silver          |  |  |                                                     |  |  |
| L3DA                 | Lutron Hi-Lume 1% EcoSystem with soft on, fade to black dimming                 |                    | 35 - 35°                           |                |                      | S - Solite filter  |                   |                |                          |         |              | MTO - Made to order |           |              | MTO - Made to order |  |  |                                                     |  |  |
| EEI <sup>3,4</sup>   | Hi-lume 1% EcoSystem/3-Wire L3D Driver                                          |                    | 45 - 45°                           |                |                      |                    |                   |                |                          |         |              |                     |           |              |                     |  |  |                                                     |  |  |
| EDIO <sup>3,4</sup>  | eldoLED Eco 1% Dim (0-10V)                                                      |                    |                                    |                |                      |                    |                   |                |                          |         |              |                     |           |              |                     |  |  |                                                     |  |  |
| EDID <sup>3,4</sup>  | eldoLED Solo 0.1% Dim (0-10V)                                                   |                    |                                    |                |                      |                    |                   |                |                          |         |              |                     |           |              |                     |  |  |                                                     |  |  |
| EDID <sup>3,4</sup>  | eldoLED Solo 0.1% Dim (DALI)                                                    |                    |                                    |                |                      |                    |                   |                |                          |         |              |                     |           |              |                     |  |  |                                                     |  |  |
|                      |                                                                                 |                    |                                    |                |                      |                    |                   |                |                          |         |              |                     |           |              |                     |  |  | 1. Intelligent Drive is the standard driver.        |  |  |
|                      |                                                                                 |                    |                                    |                |                      |                    |                   |                |                          |         |              |                     |           |              |                     |  |  | 2. 120V only.                                       |  |  |
|                      |                                                                                 |                    |                                    |                |                      |                    |                   |                |                          |         |              |                     |           |              |                     |  |  | 3. Must specify logarithmic or linear eldolo.       |  |  |
|                      |                                                                                 |                    |                                    |                |                      |                    |                   |                |                          |         |              |                     |           |              |                     |  |  | 4. Confirm dimming curve: linear or logarithmic.    |  |  |
|                      |                                                                                 |                    |                                    |                |                      |                    |                   |                |                          |         |              |                     |           |              |                     |  |  | 5. Standard                                         |  |  |


1. Intelligent Drive is the standard driver.  
2. 120V only.  
3. Must specify logarithmic or linear eldoLED driver.  
4. Confirm dimming curve: linear or logarithmic.  
5. Standard

## LUMEN CHART

| Wattage | Delivered Lumens | Voltage    | CRI |
|---------|------------------|------------|-----|
| 10W     | 890 lm           | 120 - 277V | 93+ |
| 14W     | 1175 lm          | 120 - 277V | 93+ |
| 20W     | 1650 lm          | 120 - 277V | 93+ |
| 30W     | 2100 lm          | 120 - 277V | 93+ |

\*Above chart, ordering information, and IES File name reflect delivered lumens based 3000K and 30° optical lens.  
 \*\*Lumens will vary based on CCT, optical lens, and bevel finish.

## DIMENSION/CONFIGURATION

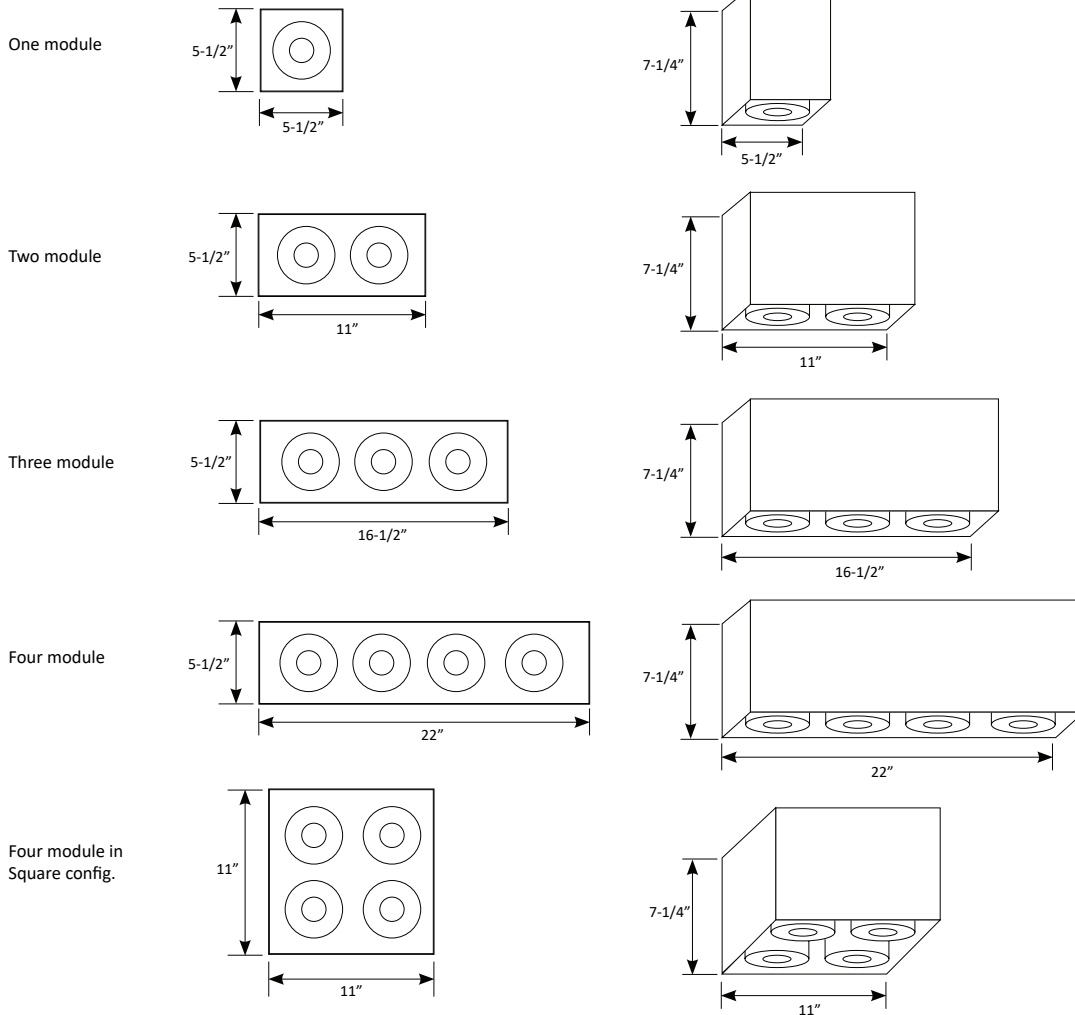


## OPTICAL LENS




12°, 22°, 27°, 35°, 45°

## FILTERS

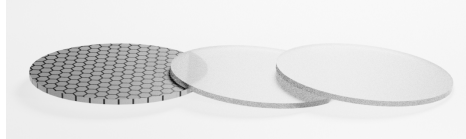


H - Honey comb    F - Frosted filter    S - Solite filter

## Module Mechansim



## MODULE TYPE



B - Bevel

R - Regress

S - Snoot