


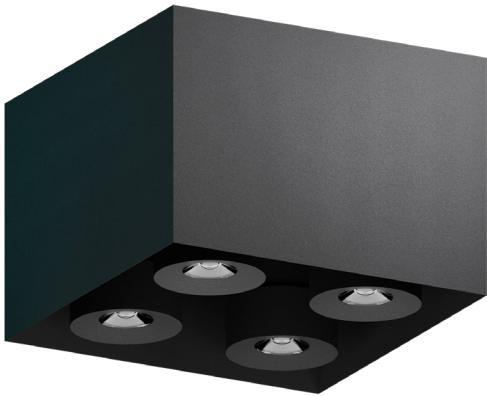

USE OF PRODUCT
The Elevate Architectural Surface Mount Series offers a point source solution that is available in a single gimbal with retractable yoke. Offered in an assortment of lumen, color temperature, beam angle, and filter options that may be modified in the field. Modules are available in bevel, regress, or snoot appearance. This product is for indoor use only.

LED MODULE
Cree LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management. LED module is field replaceable.

FRAME CONSTRUCTION
Constructed from 20 gauge cold rolled steel with powder coat finish.

ADJUSTMENT
Single gimbal (45° Tilt) with retractable yoke and 360° rotation. both mechanisms are lockable.

OPTICS
Field replaceable TIR optics available in 12°, 22°, 27°, 35°, and 45°. Easily achieve narrow spot to wide flood beam pattern. Option for frosted, honeycomb, or solite filter (2 maximum).

DIMMING
Available in 7 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (L3DA) Hi-lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V. All drivers are integral and are field replaceable.

THERMAL MANAGEMENT
Ambient temperatures at fixture location should not exceed -20° to 40°C.

MOUNTING
Mounts directly to junction box.

LABELS/COMPLIANCE/WARRANTY
- CSA Listed for US and Canada
- Damp rated
- 5 Year limited warranty



ORDERING INFORMATION

ORDERING INFORMATION								RPM						
Family		Mounting types	Module Configuration	Lumens Per Head	Color Temperature	Optical Lens	Voltage	Dimming	Optical Lens	Filter	Trim Type	Frame Finish		
Series	Housing Size	Mounting Types	Module Configuration		Lumens Per Head		Color Temperature		Voltage		Frame Finish			
RPM	M - Medium	SM - Surface Mount	1 - One module		8L - 890 lm		27 - 2700K		UNV - 120-277V					
Elevate			2 - Two module		11L - 1175 lm		30 - 3000K		120 - 120V					
Series			3 - Three module		16L - 1650 lm		35 - 3500K							
			4 - Four module		21L - 2100 lm		40 - 4000K							
			4S - Four module w/ Square Config.											
			MTO - Made to order											
Dimming			Optical Lens		Filter		Module Type		Frame Finish		Module Finish		Options	
ID ¹	Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive)		12 - 12°		None - Leave blank		R ⁵ - Regress		B - Black		B - Black		EM - Emergency Battery	
PEQ0	Lutron Hi-Lume Premier Ecosystem 0.1% w/ soft on, fade to black dimming		22 - 22°		F - Frosted filter		B - Bevel		W - White		W - White		LAW - Lutron Athena Wireless Node (RF only version)	
LDE1	Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming		27 - 27°		H - Honeycomb		S - Snoot		S - Silver		S - Silver			
L3DA	Lutron Hi-Lume 1% EcoSystem with soft on, fade to black dimming		35 - 35°		S - Solite filter				MTO - Made to order		MTO - Made to order			
EEI ^{3,4}	Hi-Lume 1% EcoSystem/3-Wire L3D Driver		45 - 45°											
EDIO ^{3,4}	eldoLED Eco 1% Dim (0-10V)													
EDID ^{3,4}	eldoLED Solo 0.1% Dim (0-10V)													
EDID ^{3,4}	eldoLED Solo 0.1% Dim (DALI)													
1. Intelligent Drive is the standard driver. 2. 120V only. 3. Must specify logarithmic or linear eldo. 4. Confirm dimming curve: linear or logarithmic. 5. Standard														

1. Intelligent Drive is the standard driver.
2. 120V only.
3. Must specify logarithmic or linear eldoLED diver.
4. Confirm dimming curve: linear or logarithmic.
5. Standard



LUMEN CHART

Wattage	Delivered Lumens	Voltage	CRI
10W	890 lm	120 - 277V	93+
14W	1175 lm	120 - 277V	93+
20W	1650 lm	120 - 277V	93+
30W	2100 lm	120 - 277V	93+



*Above chart, ordering information, and IES File name reflect delivered lumens based 3000K and 30° optical lens.
 **Lumens will vary based on CCT, optical lens, and bevel finish.

DIMENSION/CONFIGURATION



One module





Two module





Three module

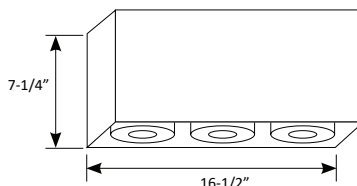

Four module

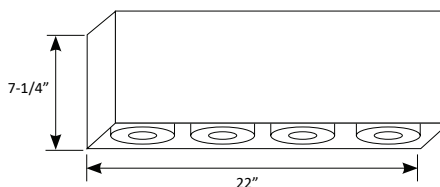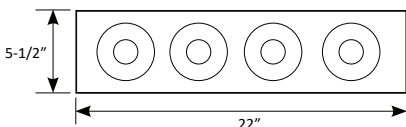

Four module in Square config.




OPTICAL LENS




12°, 22°, 27°, 35°, 45°

FILTERS

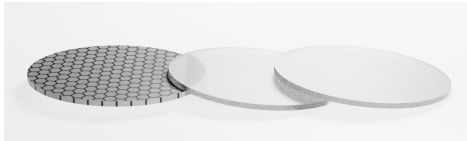


H - Honey comb F - Frosted filter S - Solite filter


Module Mechansim




MODULE TYPE



B - Bevel



R - Regress



S - Snoot